


1

Create & Configure your Talk2M Account

Download & install eCatcher


<https://resources.ewon.biz/download/ecatcher>

Create your account* using the “Create a Free+ Account” link

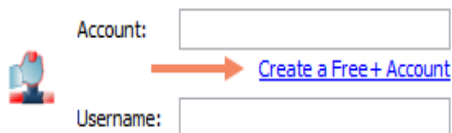

*Account creation require email validation

Log in to eCatcher & add* your first Ewon

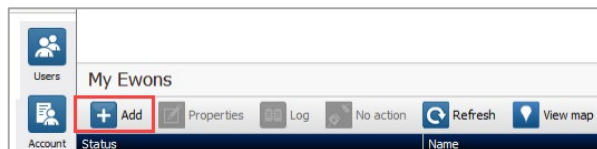

*Click on the “Add” button & follow the wizard

2

Create your setup files (USB)

On the Talk2M Connectivity screen,
Click on “Launch Setup Wizard” in the USB/SD Card option

USB / SD Card




Launch Setup Wizard

The setup wizard will ask you for:

- System settings such as password, language, and clock settings
- WAN (Internet side) settings such as IP address (default: obtain automatically by DHCP)
- LAN (machine side) settings such as IP address.


Proceed to follow the Wizard

Save the configuration files created by the Wizard to a USB stick

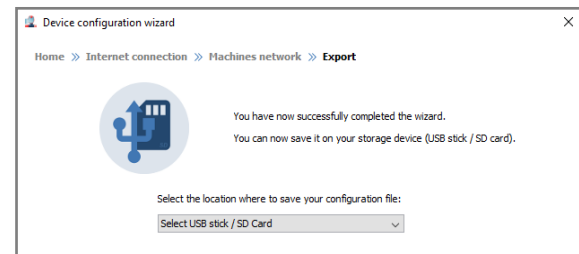


3**Configure your Ewon device****Prepare your Ewon device for Internet communication:**

Plug the network Ethernet cable into Port 4

**Connect your Ewon device to power**

When the Ewon device has fully booted, the **USR LED** will slowly blink **GREEN**

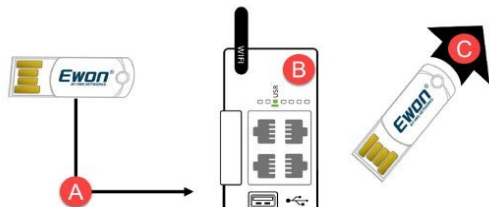
Insert the USB configuration key into the Cosy+

When the Cosy USR LED state changes to solid **GREEN**, remove the USB key & wait
The Cosy will reboot, test the configuration & establish the connection with Talk2M*


*This operation can take several minutes

Easy Setup for Cosy+ [Ethernet - EC71330]**4****Connect to your remote device**

In eCatcher, the status of your Ewon device should now be **“Online”**
Simply highlight your Ewon device and click **“Connect”**

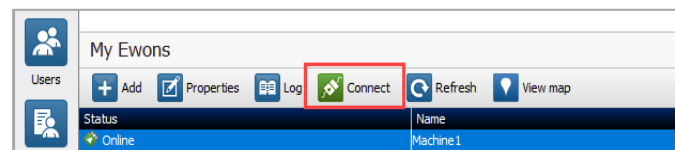

**Your setup is now complete !
Congratulations!**

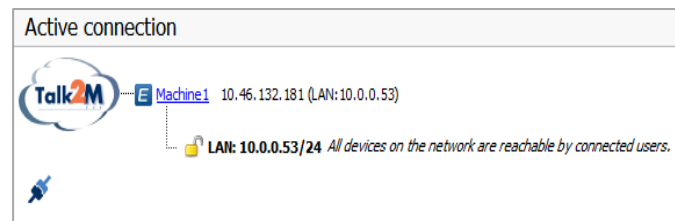

Visit

<https://www.ewon.biz/technical-support/support-home>
for detailed instructions and more information about connecting to your model PLC